


Muut koneet ja koot piirustuksen tai mallikappaleen mukaan.

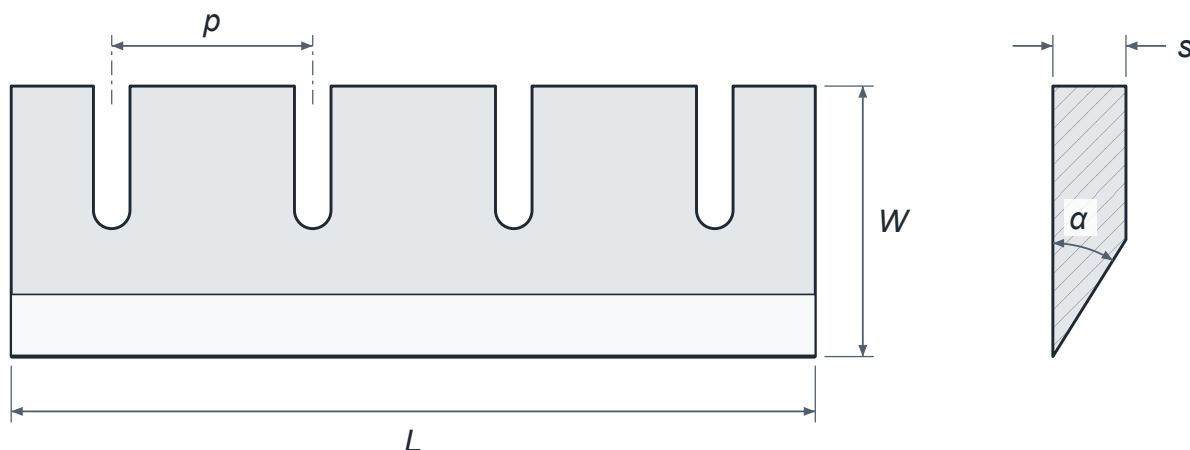

Periaatekuva. L = pituus, W = leveys, s = paksuus, α = teroituskulma, p = urien jako.

L × W × s, mm	Malli
Bruks	
258 × 130 × 12	722
258 × 80 × 9	722MT, 980AH
300 × 130 × 12	1300AH
400 × 135 × 14	1200M, 1200AH, 1300M
465 × 165 × 16	1500M, 1500AH
525 × 180 × 16	1700–2000M, 1700–2000AH
550 × 175 × 20	800CM, 2003R
575 × 185 × 16	800CT, 1600CT
612 × 210 × 16	1300CT
705 × 180 × 16	700, 1203C
800 × 185 × 16	802, 803, 1001, 1002CT
852 × 183 × 16	804CT, 806
Camura	
1102 × 141 × 12,7	–
Erjo	
350 × 75 × 10	165 SN
450 × 125 × 12	200 SN
550 × 75 × 10	–
550 × 125 × 12	KH 40450
700 × 125 × 12	702

L × W × s, mm	Malli
Heinola	
630 × 155 × 12	TT 75 RS
720 × 155 × 12	TT 97
1090 × 180 × 12	1310
Jenz	
80 × 70 × 13	AZ 35
108 × 60 × 7	HEM 561
220 × 60 × 7	–
Klöckner	
330 × 85 × 14	–
430 × 85 × 14	–
530 × 85 × 14	–
530 × 120 × 20	–
530 × 210 × 20	–
830 × 120 × 20	–
830 × 210 × 20	–
930 × 120 × 20	–
930 × 210 × 20	–
1130 × 210 × 20	–
Pallmann	
565 × 295 × 25	PHT 500 × 1050
665 × 295 × 25	PHT 450 × 1200
780 × 220 × 20	–

L × W × s, mm	Malli
Rudnick & Enners	
530 × 130 × 12	–
630 × 130 × 12	SH 330 × 500
630 × 160 × 15	–
780 × 160 × 15	–
780 × 220 × 20	250 × 650/5
Sjölins	
550 × 110 × 10	–

Mitat ja kovuus

- Leveys W on uuden terän leveys.
- Mallimerkinnät ovat ohjeellisia.
- Teroituskulma 25–40°, kovuus 54–58 HRC.



WhatsApp 09 873 6292
adamet.fi/hakkurin-terat